



A good start...

Brio Tent Series Tents are the starting elements for your own event space designs. Possible to Combine and expand these units with other elements.

The Brio system offers highly efficient solutions for VIP events, parties, exhibitions, promotions as well as tailor-made storage facilities - from simple to extensive.

we guarantee that all our structures are tested and approved in compliance with the applicable regulations. As all system components are available for years to come, the combination and expansion options are limitless.

The technology behind the Brio Series Tents are full of creativity. Easy to transport, assemble and dismantle, store and clean.






48X84X3

Frame

- Extruded 2-groove aluminium hollow profiles
- Specially designed Curtain tubes (Standard Version)
- Curtain tubes, eave purlins and gable wall beams made of aluminium
- All aluminium components are technically anodized.
- PVC-coated cables, preventing blackening stains on contact with the covers
- All steel parts are hot-dip galvanized according to DIN EN ISO 1461
- Simple installation of the covers from the ground through keder channels
- Adjustable base plates for compensation of unlevel surfaces.
- Structure lengths in 3 m increments
- Portal beams for free access to all points available on request; without disturbing cables or braces

Covers

- Textile covers made of polyester fabric, coated with PVC on both sides, weight approx. 630 g/m²
- Translucent roof covers for daylight conditions inside the tent
- Opaque covers for black-out conditions
- Time-saving expander tensioning system for fixation of roof covers
- Secure fixing of the valance using the spindle-fix system stops valance flapping in the wind and offers additional rain protection in eave area
- Flame retardant according to DIN 4102, fire class B1
- For side and gable curtains, quality zippers: Rapid opening and closing
- Standard fabric colour white; other colours available on request
- Side curtains with windows in several attractive designs

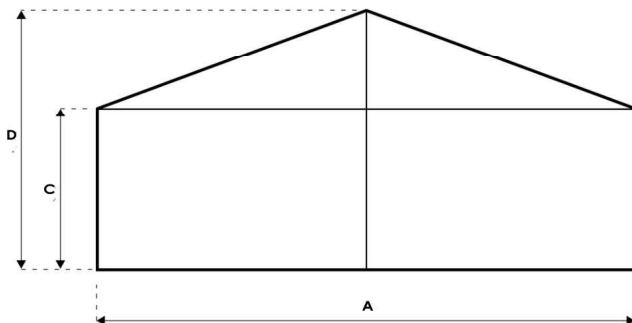

Options

- Roll-up entrances, Aluminium doors, double-wing
- Gables with ventilations
- Roof covers and side curtains of transparent foil
- Covers with individual texts or motifs for branding
- Cassette flooring, Ramps at entrances and exits
- Assembly tools

Dimensions and Weights

TYPE	4/250	6/250	8/250	10/250
Width (system dimension) (m) (A)	4.025	5.975	8.085	10.105
Width (outer dimension baseplate) (m)	4.205	6.155	8.265	10.285
Eave height (mm) (C)	2.500	2.500	2.500	2.500
Ridge height (mm) (D)	3.015	3.370	3.750	4.120
Truss-distance (m)	3.000	3.000	3.000	3.000
Minimum structure length (m)	3.000	3.000	6.000	6.000
Roof slope (degrees)	20	20	20	20
Longest component (m)	4.000	3.180	4.250	5.300
Weight of frame approx. (kg/m ²)	4.500	4.350	4.200	4.050
Weight of covers approx. (kg/m ²)	2.000	1.850	1.650	1.400
Gable pole	-	x	x	x

NOTE: Subject to alterations in the interest of product improvement in line with state-of-the-art technology progress