



A good value marquee...

Simplified and modular frame system make this large tent system especially cost effective. Available from 10- 15 m, the EVO Series Tents offers high quality and an attractive price.

Everything in this system can be combined and interchanged with the fully developed technology of this particular modular system.

The EVO Basis Tent system: a tent rental company's most profitable rental asset.

The EVO system offers highly efficient solutions for VIP events, parties, exhibitions, promotions as well as tailor-made storage facilities - from simple to extensive.

We guarantee that all our structures are tested and approved in compliance with the applicable regulations. As all system components are available for years to come, the combination and expansion options are limitless.








TECHNICAL DETAILS

The EVO Basis Tent series tents developed specially for professional rental companies and high quality end-user applications. Modular for diverse combination and expansion.

Frame

- Trusses of extruded 4-groove aluminium hollow profiles
- Integrated curtain groove in eave purlins and gable wall beams
- Aluminium eave purlins and gable wall beams
- All aluminium components technically anodized
- All steel parts are galvanized according to DIN EN ISO 1461
- Frame requires no maintenance
- Easy fitting of covers by means of keder grooves
- Ridge and eave purlins are identical. Easy fitting and storage
- Truss-distance 5 m and Roof slope 18 degrees
- Structural lengths in 5-m-increments
- Structures may be joined to form larger areas

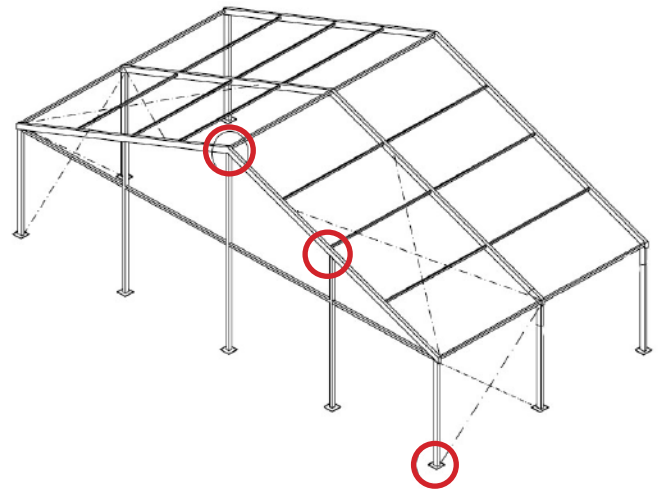


Covers

- Textile covers made of polyester fabric, coated with PVC on both sides, weight approx. 650 g/m²
- Translucent roof covers for daylight conditions inside the tent
- Opaque covers for black-out conditions
- Spindle-fix roof tensioning system with quick and easy fixing of the roof cover.
- Flame retardant according to DIN 4102, fire class B1
- Curtains with hems for accommodating weighted tubes (on request)
- Side and gable curtains with standard plug fastening: Easy to open and close
- Side curtains with windows available in several attractive
- Glass or hard-PVC system wall elements, side heights 3.40 m and 4.00 m



NOTE: Subject to alterations in the interest of product improvement in line with state-of-the-art technology progress

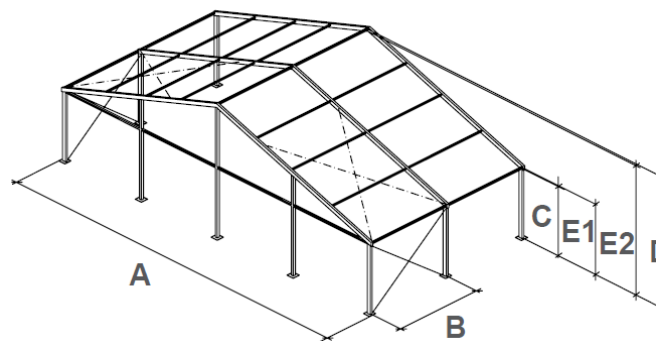

| Type | A | C | D | E1 | E2 | Longest component | Truss profile | Possibilities for beam splice | |
|---------------|-------|-------------|--------------|------------------|-------|-------------------|---------------|-------------------------------|----------|
| | Width | Eave height | Ridge height | Inner dimensions | | | | standard beam | optional |
| | | | | Eave | Ridge | | | | |
| (m) | (m) | (m) | (m) | (m) | (m) | (m) | (m) | | |
| 10/280 | 10 | 2.840 | 4.470 | 2.760 | 4.370 | 5.550 | 170X110 | 5.0 | - |
| 10/340 | 10 | 3.240 | 4.870 | 3.160 | 4.770 | 5.700 | 170X110 | 5.0 | - |
| 10/400 | 10 | 3.840 | 5.470 | 3.760 | 5.370 | 6.050 | 170X110 | 5.0 | - |
| 12/280 | 12 | 2.840 | 4.750 | 2.760 | 4.650 | 6.550 | 170X110 | 6.0 | - |
| 12/340 | 12 | 3.240 | 5.150 | 3.160 | 5.050 | 6.550 | 170X110 | 6.0 | - |
| 12/400 | 12 | 3.840 | 5.750 | 3.760 | 5.650 | 6.550 | 170X110 | 6.0 | - |
| 15/280 | 15 | 2.840 | 5.210 | 2.760 | 5.110 | 8.100 | 170X110 | 7.5 | 5.0/2.5 |
| 15/340 | 15 | 3.240 | 5.610 | 3.160 | 5.510 | 8.100 | 170X110 | 7.5 | 5.0/2.5 |

NOTE: Subject to alterations in the interest of product improvement in line with state-of-the-art technology progress